


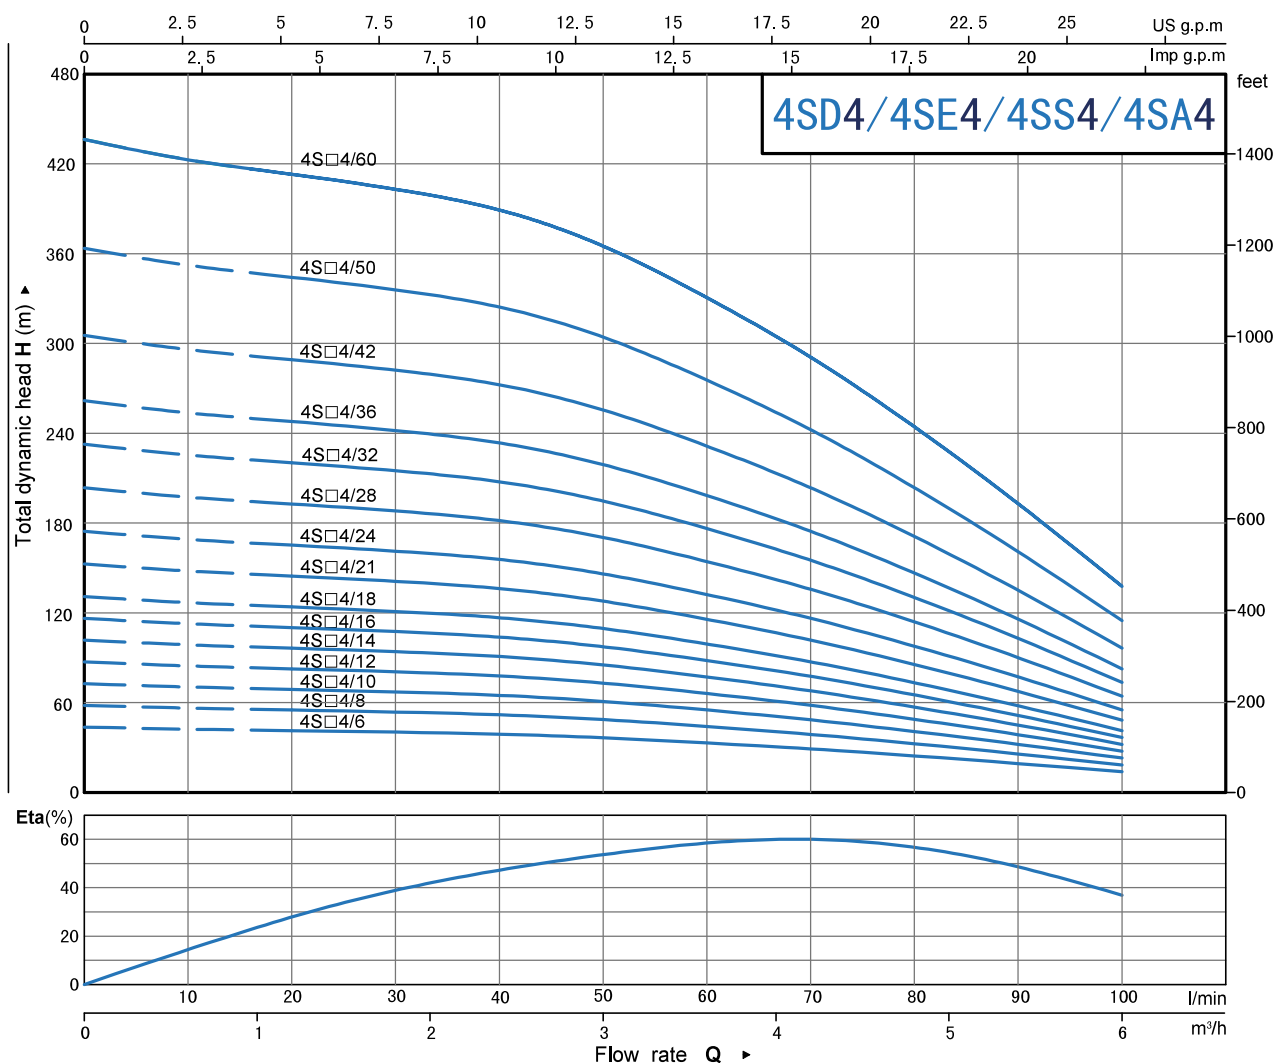

PERFORMANCE DATA 50Hz

MODEL		P ₂		DELIVERY n≈2850 1/min											
1~ 220 - 240V	3~ 380 - 415V	kW	HP	Q m³/h l/min	0	0.6	1.2	1.8	2.4	3.0	3.6	4.2	4.8	5.4	6.0
					0	10	20	30	40	50	60	70	80	90	100
4S□M4/6	4S□4/6	0.37	0.5	H(m)	44	42	41	40	39	36	33	29	24	19	14
4S□M4/8	4S□4/8	0.55	0.75		58	56	55	54	52	49	44	39	33	26	18
4S□M4/10	4S□4/10	0.75	1		73	70	69	67	65	61	55	48	41	32	23
4S□M4/12	4S□4/12	0.92	1.25		87	84	82	81	78	73	66	58	49	39	27
4S□M4/14	4S□4/14	1.1	1.5		102	98	96	94	91	85	77	68	57	45	32
4S□M4/16	4S□4/16	1.3	1.75		116	113	110	107	104	97	88	77	65	51	37
4S□M4/18	4S□4/18	1.5	2		131	127	124	121	117	109	99	87	73	58	41
4S□M4/21	4S□4/21	1.8	2.5		152	148	144	141	136	128	115	102	85	67	48
4S□M4/24	4S□4/24	2.2	3		174	169	165	161	156	146	132	116	98	77	55
4S□M4/28	4S□4/28	2.6	3.5		203	197	192	188	182	170	154	135	114	90	64
4S□M4/32	4S□4/32	3	4		232	225	220	215	208	195	176	155	130	103	73
-	4S□4/36	3.7	5		261	253	247	242	234	219	198	174	146	116	82
-	4S□4/42	4	5.5		305	295	289	282	273	255	231	203	171	135	96
-	4S□4/50	5.5	7.5		363	352	344	335	325	304	275	242	203	160	115
-	4S□4/60	7.5	10		436	423	413	403	389	365	331	291	244	193	138

•4S□ in the above table can be replaced by any of 4SD, 4SE, 4SS, 4SA